




DOUBLE COMPRESSION WP & FLP

CABLE GLANDS

WITH LOCKNUT, EARTH TAG, IP NYLON WASHER, SERRATED WASHER, PVC / LSF SHROUD.

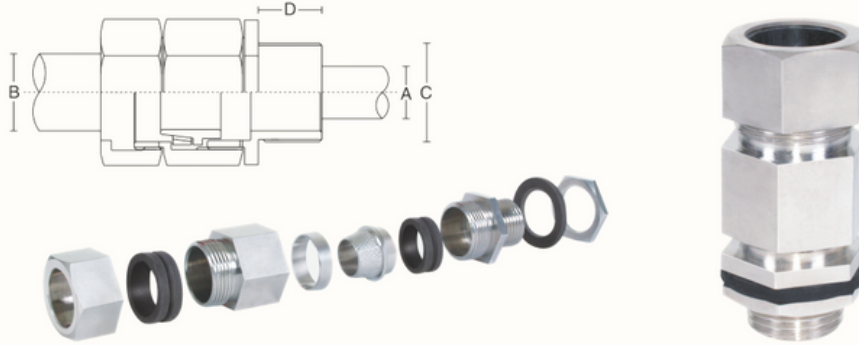

TECHNICAL DATA

Size	:	01 SS TO 016	Material	:	Brass BS 2874 CZ121 Pb3.
IP Rating	:	IP65	Option Threads	:	Metric.
Application	:	For indoor or outdoor use with all types of SWA Cable.	Operating Temp.	:	-20° C to +120° C
Standards	:	BS 6121, IEC 62444, EN 62444, EN50262	Accessories	:	Matching Accessories available like Locknuts & 'O' Ring
Finish	:	Natural Brass Finish, Nickel Finish.			

Code No.	GLAND SIZE	THREAD SIZE (INCH)	WEATHER PROOF LENGTH OF THREAD 'D'	FLAME PROOF LENGTH OF THREAD 'D'	CABLE RANGE	
					MAX 'A'	MAX 'B'
CI-CG-DCFL-01SS	01 SS	3/4"	15	25	8	12
CI-CG-DCFL-01 s	01 s	3/4"	15	25	10	16.5
CI-CG-DCFL-01	01	3/4"	15	25	12	18
CI-CG-DCFL-01 A	01 A	1"	15	25	12	18
CI-CG-DCFL-02	02	1"	15	25	14	20
CI-CG-DCFL-02 A	02 A	3/4"	15	25	14	20
CI-CG-DCFL-03	03	1"	15	25	17	23
CI-CG-DCFL-04	04	1"	15	25	20	26
CI-CG-DCFL-04 A	04 A	1 1/4"	15	25	20	26
CI-CG-DCFL-05	05	1 1/4"	15	25	24	30
CI-CG-DCFL-05 A	05 A	1 1/2"	15	25	24	30
CI-CG-DCFL-06	06	1 1/2"	15	25	27	33
CI-CG-DCFL-06 A	06 A	1 1/4"	15	25	27	33
CI-CG-DCFL-07	07	1 1/2"	15	25	30	37
CI-CG-DCFL-08	08	2"	15	25	35	41
CI-CG-DCFL-09	09	2"	15	25	40	46
CI-CG-DCFL-010	010	2"	20	25	46	52
CI-CG-DCFL-010 A	010 A	2 1/2"	20	25	46	52
CI-CG-DCFL-011	011	2 1/2"	20	25	54	60
CI-CG-DCFL-012	012	3"	20	25	60	67
CI-CG-DCFL-013 A	013 A	3"	20	25	66	72
CI-CG-DCFL-013	013	3 1/4"	20	25	72	78
CI-CG-DCFL-014	014	3 1/2"	20	25	78	84
CI-CG-DCFL-015	015	4"	20	25	88	94
CI-CG-DCFL-016	016	4 1/2"	20	25	98	105

All Unspecified Dimensions are in MM