




# EIW SERIES CABLE GLANDS

WITH LOCKNUT, EARTH TAG, IP NYLON WASHER, SERRATED WASHER, PVC / LSF SHROUD.

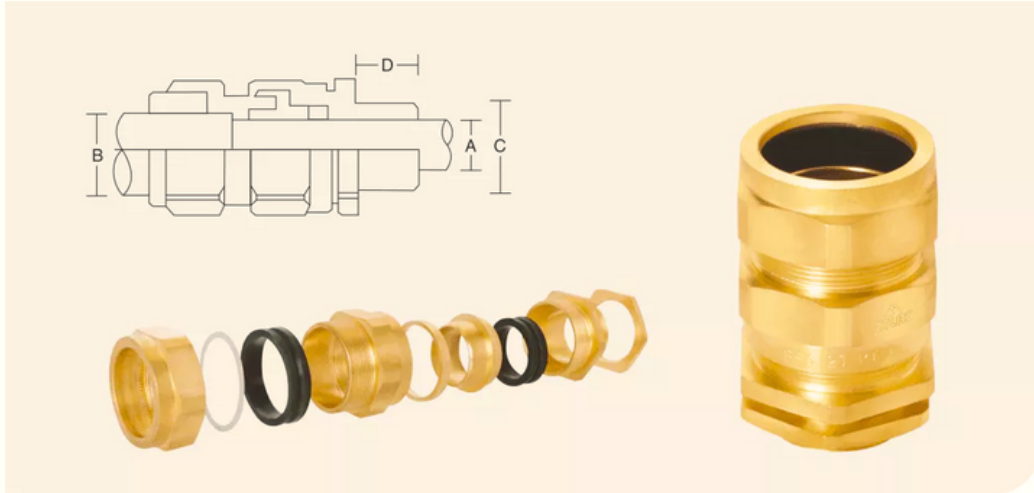

## TECHNICAL DATA

Size	: 20mm to 100mm S & L	Material	: Brass BS 2874 CZ121 Pb3.
IP Rating	: IP65	Option Threads	: Metric, NPT, BSP & PG.
Standards	: BS 6121, IEC 62444, EN 62444, : EN50262	Operating Temp.	: -60° C < Tamb < +125° C
Application	: For indoor or outdoor use with all types of SWA Cable.	Accessories	: Lock Nut, Earth Tag, IP Nylon Washer, Serrated Washer, PVC / LSF Shroud.
Seals	: Standard seals -200 C to +800 C.	Finish	: Natural Brass Finish, Nickel Finish.
		Function	: EIW type glands provide a seal on the inner sheath, a seal on the outersheath and an Armour Specific armour clamp for armoured cable. The armour clamp provides an electrical bond between the armour cable and the gland.

CODE NO.	GLAND SIZE	THREAD SIZE 'C'		MINIMUM LENGTH OF THREAD D	CABLE RANGE 'A'		CABLE RANGE 'B'	
		METRIC	NPT		MIN.	MIN.	MIN.	MAX.
CI-CG-EI-20S	EIW 20S	M20	1/2"	15	8.8	11.7	11.8	16
CI-CG-EI-20L	EIW 20L	M20	1/2"	15	11.4	14	14	20.8
CI-CG-EI-25S	EIW 25S	M25	3/4"	15	13	16	18	24
CI-CG-EI-25L	EIW 25L	M25	3/4"	15	17.3	20	20.3	27.4
CI-CG-EI-32S	EIW 32S	M32	1"	10	20	23	24.5	31
CI-CG-EI-32L	EIW 32L	M32	1"	15	24.2	26.3	26.5	33.5
CI-CG-EI-40S	EIW 40S	M40	1-1/4"	15	26	29	30.4	36
CI-CG-EI-40L	EIW 40L	M40	1-1/4"	15	29.5	32.1	33.2	40
CI-CG-EI-50S	EIW 50S	M50	1-1/2"	15	33	38.1	40	46.5
CI-CG-EI-50L	EIW 50L	M50	2"	15	38	44	44	52.6
CI-CG-EI-63S	EIW 63S	M63	2"	20	44	50.5	50	59
CI-CG-EI-63L	EIW 63L	M63	2-1/2"	20	50	56	56	66
CI-CG-EI-75S	EIW 75S	M75	2-1/2"	20	56	62	63.5	71
CI-CG-EI-75L	EIW 75L	M75	3"	20	62	68.5	69	78
CI-CG-EI-90	EIW 90	M90	3"	20	65	80	84	96
CI-CG-EI-100	EIW 100	M100	3-1/2"	20	82	90	84	102

All Unspecified Dimensions are in MM

